

TELESCOPING SERIES

ACE - TS



One brewer...One solution

Newco's Telescoping Brewer that adjusts to fit your shorter dispensers.

Features

- Ready light indicates optimum brew temperature.
- Flashing brew light alerts user that coffee is brewing.
- Universal base for perfect dispenser alignment.
- Gravity fed hot water faucet for tea, soups and hot cocoa.
- Tank "ON/OFF" switch for easy installation.
- Pulse brewing option - when turned "on" allows pulsation of water over coffee grounds of coffee.
- Auto arm capable. When activated locks out brew cycle until optimum temperature is achieved.
- PDS Valve. The most accurate flow control on the market, eliminating service calls due to inconsistent pot levels.

Brokerhouse
DISTRIBUTORS INC.

info@brokerhousedist.com | www.brokerhousedist.com

LES DISTRIBUTIONS
André Labbé Inc.

info@andrelabbeeinc.com | www.andrelabbeeinc.com

Telescoping Brewer

AP CONFIGURATION:

- Brews Into The 2.0L Up To 2.5L Vessels
- Brews Into The 1.9L Up To 2.5L Vessels
- Brews Into The 2.0L Up To 2.5L Vessels
- Brews Into The 2.2L KK Airpots.

LD CONFIGURATION:

- Brews Into The 2.5L Zojirushi AYA-E
- Brews Into The 1.9L Up To 3.8L ShurizJo Thermal Servers Without Base.
- Brews Into The 2.0L ShurizJo Airpot.

TD CONFIGURATION:

- Brews Into The 2.5L Zojirushi AYA-E with Base
- Brews Into The 1.9L & 2.5L Thermal Servers w/ Reg Base.
- Brews Into The 3.8L ShurizJo Thermal Servers Without Base.


TC CONFIGURATION:

- Brews Into Thermal Butler/ Brew though lid.
- Brews Into Short Thermal Carafe/ Brew though lid/ Vaculator.
- Brews Only Into The 1.9L Vaculator S/S Thermal Server - Tall.

Ace Telescoping

Machine Height Basket Clearance in Inches

16.5 Minimum	9.5 Minimum
17.25	10
18.25	11
19.25	12
20.25	13
21.25	14
22.25	15
23.25	16
24.25	17
25.25	18
26.25 Maximum	19 Maximum

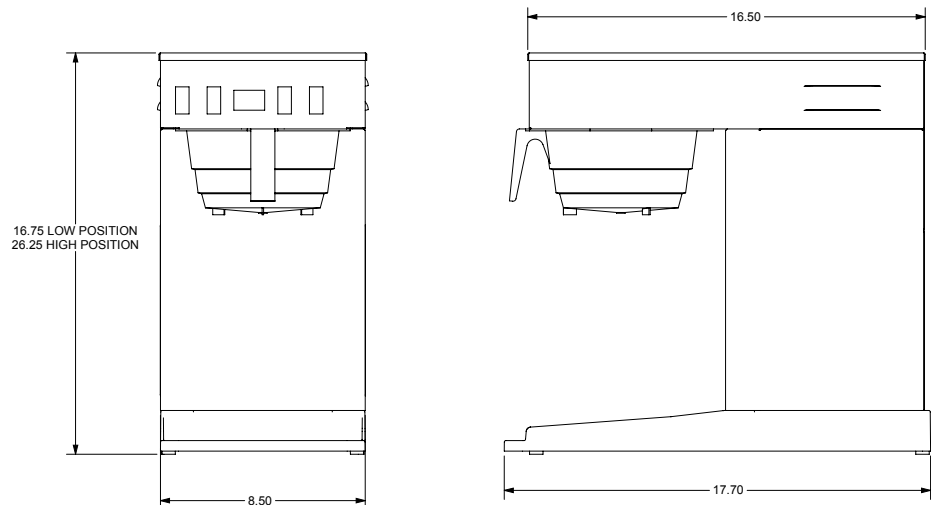

Additional Information

Part Number	Model	Height	Width	Depth	Volts	Watts	Amps	Ship Wt.
105600	ACE-TS, SHORT	VAR	8.5	17.5	USA / CAN 120 / 120	USA / CAN 1750 / 1400	USA / CAN 14.6 / 11.7	34

*Cord not included on 240v models. Available for purchase. Contact Customer Service.

Electrical: 120V models are 2 wires plus ground service rated 120V, single phase, 60Hz. 120/240 V models are 3 wires plus ground service rated 120/240 V, single phase, 60Hz

Plumbing: Water line should be 20-90 PSI and have a minimum flow rate of 1.5 GPM. Mechanical connection on brewer is 1/4" male flare connector.

Brokerhouse
DISTRIBUTORS INC.

info@brokerhousedist.com | www.brokerhousedist.com

LES DISTRIBUTIONS
André Labbé Inc.

info@andrelabbeeinc.com | www.andrelabbeeinc.com