



EVERPURE® 4H CARTRIDGE

DELIVERS PREMIUM QUALITY WATER FOR HOT CUP VENDING APPLICATIONS

4H Replacement Cartridge:
EV9610-00 (1 pk)
EV9611-00 (6 pk)



APPLICATIONS

Hot Cup Vending

FEATURES • BENEFITS

Provides clear, fresh, premium quality ingredient water for great tasting hot beverages

Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination

Exclusive precoat filtration provides superior chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.5 micron in size by mechanical means

Saves energy by reducing scale build-up; proportioned scale inhibitor feed dramatically prevents limescale from forming in equipment

Everpure's unique filter blend using activated carbon reduces chlorine taste & odor and other offensive contaminants

Engineered to always feed the correct amount of scale inhibitor into each volume of water

Does not remove fluoride

NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means

INSTALLATION TIPS

Never use saddle valve for connection.

Use 3/8" water line.

Install vertically with cartridge hanging down.

Allow 2 1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

Flush 4H cartridge by running water through filter for three (3) minutes at full flow.

OPERATION TIPS

Change cartridges on a regular six (6) month preventative maintenance program.

Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).

Service flow rate must not exceed 0.5 gpm (1.9 Lpm).

Always flush the filter cartridge at time of installation and cartridge change.


SIZING

Service Flow Rate: Maximum 0.5 gpm (1.9 Lpm)

Rated Capacity: 3,000 gallons (1,135.624 L)

EVERPURE® 4H CARTRIDGE

EV9610-00

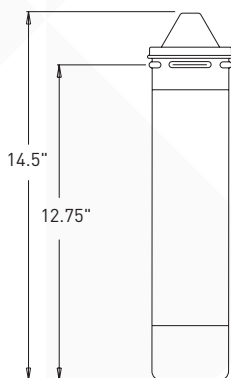

SPECIFICATIONS

Service Flow Rate

Maximum 0.5 gpm (1.9 Lpm)

Rated Capacity

3,000 gallons (1,135.6 L)

Pressure Requirements

10 - 125 psi (0.7 - 8.6 bar), non-shock

Temperature

35 - 100°F (2 - 38°C)

Overall Dimensions

14.5" L x 3.25" D (36.8 cm x 8.2 cm)



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 —
AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chlorine

Mechanical Filtration
Nominal Particulate Class I

STANDARD NO. 53 —
HEALTH EFFECTS

Mechanical Filtration
Cyst

EPA No. 002623-IL-002

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

WARRANTY

Everpure water treatment systems by Pentair® (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.

Brokerhouse
DISTRIBUTORS INC.

info@brokerhousedist.com | www.brokerhousedist.com

— LES DISTRIBUTIONS —
André Labbé Inc.

info@andrelabbeeinc.com | www.andrelabbeeinc.com